






TECHNICAL DATA

ESTRAD SAFETY R12/45+






PRODUCT

Estrad Safety R12/45+		Safety floor
Application	EN 685 / ISO 10874	23/34/43
		

SPECIFICATION


Thickness	 EN 428 / EN ISO 24346	2.5 mm (0.1")
Weight	 EN 430 / EN ISO 23997	3150 g/m ² (0.64 lbs/sq ft)
Roll length	 EN 426 / EN ISO 24341	20 m (65.62')
Width	 EN 426 / EN ISO 24341	2 m (6'6")

PRODUCT PROPERTIES

PROPERTY	TEST METHOD	RESULT
Indoor air certifications		M1, FloorScore
General performance	EN 13845 ASTM F1303	Conforms Conforms
Fire resistance	 EN 13501-1 ASTM E648	B _{fl} -s1 Class 1
Slip resistance	 EN 13845 AS 4586 DIN 51130 RRL Pendulum Test UNE-ENV 12633	ESf R12 R12 ≥ 45 (wet test - 4S Rubber/Slider 96) Class 3 (Slider 96)
Electrical propensity	 EN 1815	≤ 2 kV (antistatic)
Wear and scratch resistance	 EN 13845 EN 649	50,000 cycles Group T
Resistance to chemicals	 EN 423	Good chemical resistance



COLLECTIONS COLOURS
ESTRAD SAFETY R12/45+

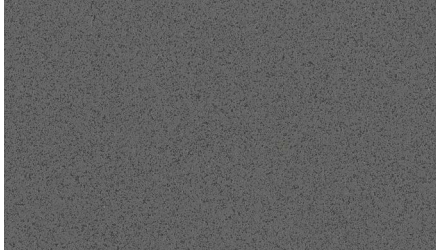

7752



7753