





TECHNICAL DATA
UPOFLOOR ESTRAD SAFETY
R12/45+



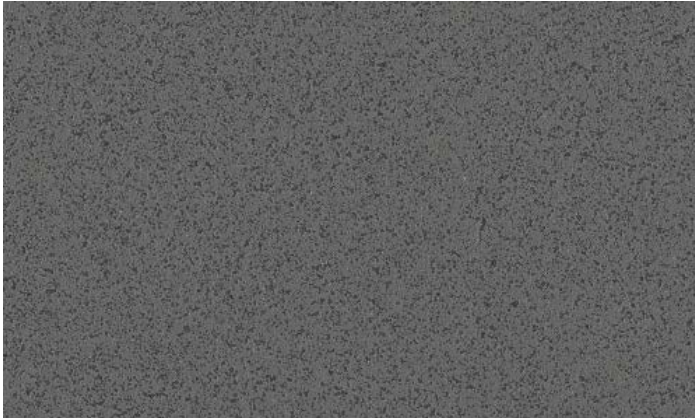

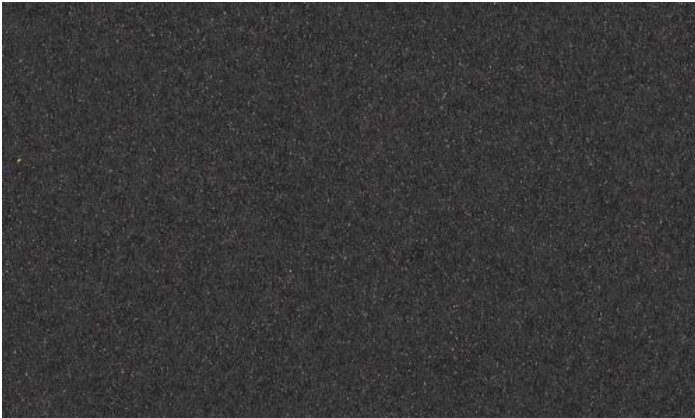







Estrad Safety R12 7752



Estrad Safety R12 7753

Estrad Safety R12/45+ is ideal for large institutional and distribution kitchens, such as restaurants and other food-processing facilities, as well as spaces where you may have a lot of grease splashes caused by cooking.

	PROPERTY	TEST METHOD	RESULT
	Thickness	EN 428 / ISO 24346	0.1" (2.5 mm)
	Weight	EN 430 / ISO 23997	0.64 lbs / sq ft (3150 g/m ²)
	Roll Length	EN 426 / ISO 24341	65.62' (20 m)
	Width	EN 426 / ISO 24341	6'6" (2 m)
	General Performance	EN 13845 ASTM F1303	Conforms Conforms
	Use Area	EN 685 / ISO 10874 23 / 34 / 43	
	Resistance to Chemicals	EN 423	Good chemical resistance
	Reaction to Fire	EN 13501-1 ASTM E648	Class Bfl-S1 Class 1
	Abrasion Resistance	EN 13845 EN 649	50,000 cycles Group T
	Enhanced Slip Resistance	EN 13845 AS 4586 DIN 51130 RRL Pendulum Test UNE-ENV 12633	ESf R12 R12 ≥ 45 (wet test - 4S Rubber/Slider 96) Class 3 (Slider 96)
	Electrical Behaviour (body voltage)	EN 1815	≤ 2 kV Classified as 'antistatic'
	VOC Emissions	AgBB VOC Test GBCA/NZGBC Green Star IEQ-VOC FloorScore Finnish M1 Classification	Pass Compliant Certified Certified