



### UNIQUE COMPRESSED QUARTZ VINYL TILES – ECOLOGICAL AND EXTREMELY DURABLE

- Easy installation with minimal waste
- PUR technology promotes easy cleaning of the floor
- No wax/finish required – ready to use
- Homogeneous construction
- Large variety of design options in monochrome and multicolour tiles in two sizes
- Certified Low-VOC Flooring Product
- Phthalate free & DEHP free

### TECHNICAL DATA

<b>Product</b>	EN 649 EN 654	Uni, Tema Mosaic, Mosaic Classic
<b>Application</b>	EN 685:23/34/43	Public spaces subject to hard wear

#### Technical Specification

<b>Thickness</b>	EN 428	2.0 mm
<b>Weight</b>	EN 430	4000 g/m <sup>2</sup>
<b>Tile Size</b>	EN 427	300 x 300 mm Mosaic: also 609.6 x 609.6 mm (24x24")
<b>Delivery Package</b>		300 x 300 mm / 5.4 m <sup>2</sup> , 609.6 x 609.6 mm / 4.46 m <sup>2</sup>

Product properties	Test method	Result
<b>Fire Resistance</b>	EN13501-1	B <sub>fl</sub> – s1
<b>Indoor Air Certifications</b>		FloorScore, M1
<b>Impact sound insulation</b>	ISO 140-6 / ISO 717-4	L <sub>w</sub> approx. 2 dB
<b>Dimensional stability</b>	EN 434	< 0.1 %
<b>Residual Indentation</b>	EN 433	< 0.05 mm
<b>Effect of castor chair</b>	EN 425	Suitable
<b>Wear resistance</b>	EN 660-2	T ≤ 2.0 mm <sup>3</sup>
<b>Colour Fastness</b>	EN ISO 105-BO2	≥ 6
<b>Slip Resistance</b>	EN 13893 DIN 51130	DS (> 0.3) R9
<b>Flexibility</b>	EN 435	40 mm (Uni, Tema)
<b>Chemical Resistance</b>		Good resistance to most acids, alkalis, and solvents
<b>Bacterial Growth</b>		Does not act as a substrate for bacterial growth



CERTIFIED BY SGS Global Services




# UPOFLOOR®

# QUARTZ/HOVI


High Performance Commercial Flooring

## Tema Collection

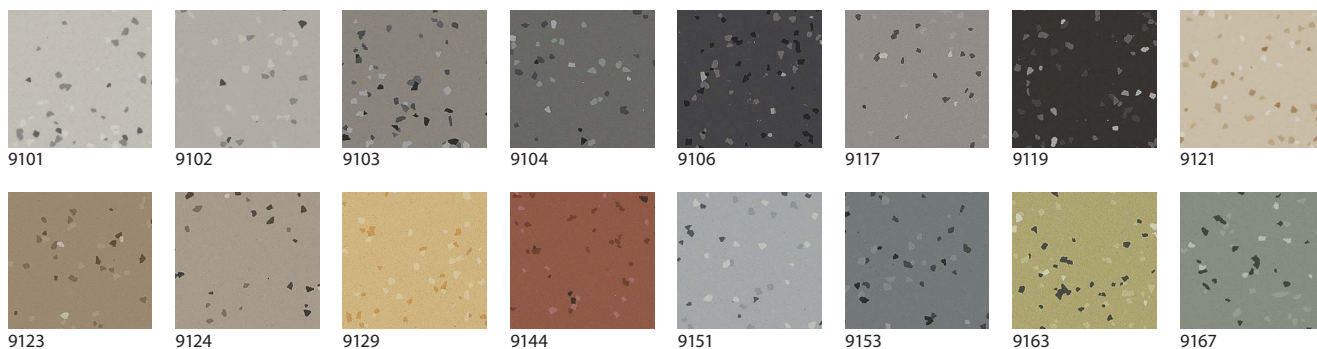

## Mosaic Collection

609.6 x 609.6 mm / 300 x 300 mm

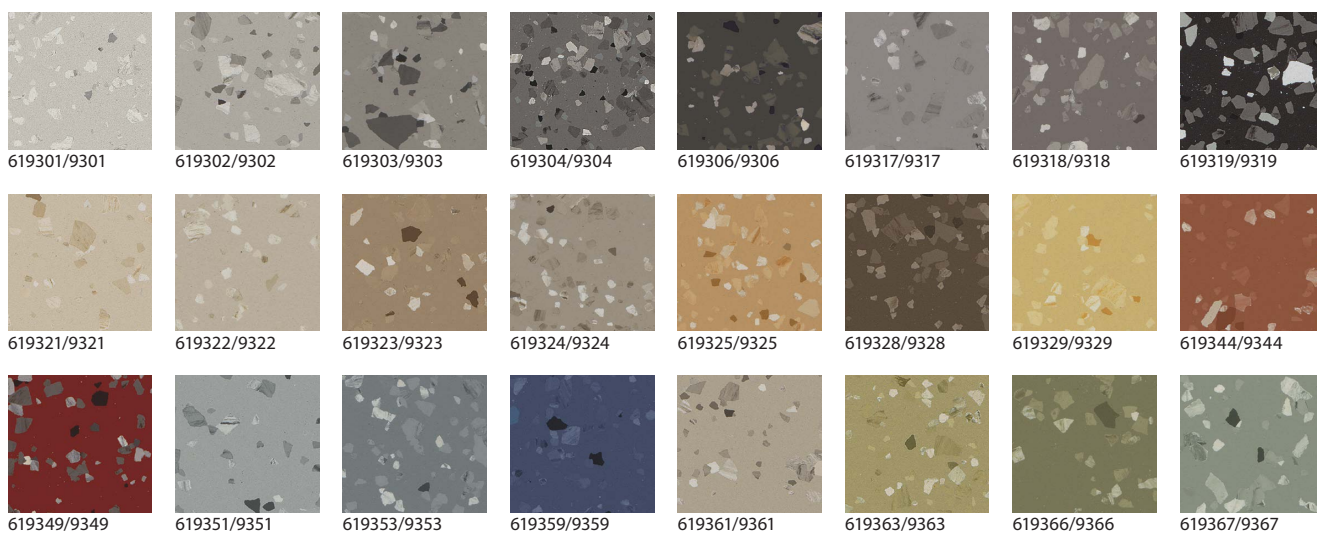

## Uni Collection



## Mosaic Classic Collection

